

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000725

International filing date: 25 February 2005 (25.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/548,727
Filing date: 26 February 2004 (26.02.2004)

Date of receipt at the International Bureau: 24 May 2005 (24.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

PA 1292928

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 10, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/548,727

FILING DATE: February 26, 2004

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



P. SWAIN

Certifying Officer

17364 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No. V2003043

In Re Application of:

Paul W. White

Alan Crawford

Examiner: Unknown

Serial No. UNKNOWN

Art Unit: Unknown

Filed: HEREWITH

For: MOUNTING SYSTEM FOR SUBSEA
FLOW INTERFACE EQUIPMENT

15535 U.S. PTO
60/548727



022604

TRANSMITTAL LETTER

Mail Stop Provisional Patent Application

Commissioner for Patents

P.O. Box 1450

Alexandria, VA 22313-1450

Dear Sir:

Enclosed herewith for filing in the above-identified case are:

- Provisional Application Cover Sheet;
- Provisional Application;
- Seven sheets of drawings;
- Our return postcard, which we would appreciate your date stamping and returning to us upon receipt.

"EXPRESS MAIL" NO. EV342455978US

I hereby certify that this paper or fee is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to Mail Stop Provisional Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Date of Deposit: 2-26-04
By: Theresa LeBlanc Theresa LeBlanc


The total filing fee has been calculated as follows:

Filing Fee = \$ 160.00

Total Fee = \$ 160.00

I hereby authorize the Assistant Commissioner to charge the fees and any additional fees that may be required, or credit any overpayment to Deposit Account No. 22-0279 ABB Vetco Gray.

Respectfully submitted,

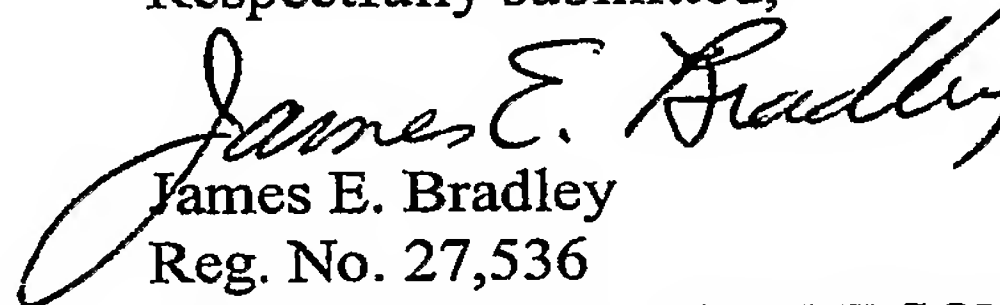

James E. Bradley

Reg. No. 27,536

BRACEWELL & PATTERSON, L.L.P.

P.O. Box 61389

Houston, Texas 77208-1389

(713) 221-3301

ATTORNEY FOR APPLICANTS

Date: Feb 26, 2004

PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION under 37 CFR 1.53(b)(2).

		Docket No.	V2003043	Type a plus sign (+) inside this box <input type="checkbox"/>	+
INVENTOR(s)/APPLICANT(s)					
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (City and Either State or Foreign Country)		
White	Paul	W.	38 Cairds Wynd, Abbots Wood, Banchory, Scotland		
Crawford	Alan		AB31 5XU 168C Hutcheon Street, Aberdeen, Scotland		
TITLE OF THE INVENTION (280 CHARACTERS MAX)					
MOUNTING SYSTEM FOR SUBSEA FLOW INTERFACE EQUIPMENT					
CORRESPONDENCE ADDRESS					
James E. Bradley BRACEWELL & PATTERSON P.O. Box 61389 Houston, Texas 77208-1389 713/221-3301					
Texas	Houston	ZIP CODE	77002	COUNTRY	USA
STATE					
ENCLOSED APPLICATION PARTS (check all that apply)					
x Specification 14 pages					
x Claims 26					
x Abstract					
x Drawings 7 pages					
METHOD OF PAYMENT (check one)					
<input type="checkbox"/> A check or money order is enclosed to cover the Provisional filing fees				PROVISIONAL FILING FEE	
x The Commissioner is hereby authorized to charge or credit all filing fees or any additional fees to Deposit Account Number: 22-0279 ABB Vetco Gray				\$160.00	

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No

☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,


James E. Bradley

Reg. No. 27,536

ATTORNEY FOR APPLICANTS

☐ Additional inventors are being named on separately numbered sheets attached hereto.

HOUSTON\1661926.1

PROVISIONAL PATENT APPLICATION

Inventors: Alan Crawford
Paul W.White

MOUNTING SYSTEM FOR SUBSEA FLOW INTERFACE EQUIPMENT**Field of the Invention:**

This invention relates in general to subsea well production, and in particular to a mounting system for mounting flow interface equipment, such as a pump on a subsea Christmas tree assembly.

1

2 **Background of the Invention:**

3 A subsea production facility typically comprises a subsea Christmas tree with associated
4 equipment. Some of the equipment mounted to the tree, such as a choke, requires retrieval from
5 time-to-time for maintenance or replacement. Many subsea trees have guideposts that attach to
6 guidelines for lowering choke retrieval tools into engagement with the frame of the tree. Also,
7 the frame of the tree may have upward-facing guide members that provide alignment as the
8 retrieval tool lands on the tree.

9 Other flow interface devices, such as multi-phase flow meters and pumps, have been
10 proposed for releasable installation on a tree. Subsea pumps, as well as some flow meters, are
11 quite heavy and bulky. Consequently, avoiding damage to the mating surfaces between the
12 interface device and the flow line at the tree assembly while landing the interface device is a
13 difficult task.

14

1 **Summary of the Invention:**

2 A mounting apparatus is provided for landing a flow interface device, particularly a
3 subsea pump or compressor (referred to collectively at times as "pressure intensifier") on a
4 subsea production assembly. A mandrel with a flow passage is mounted to a lower frame. The
5 operator lowers the lower frame into the sea and onto the production assembly. The production
6 assembly has an upward facing receptacle that is sealingly engaged by the mandrel.

7 A manifold and a flow interface device such as a pressure intensifier are mounted to an
8 upper frame. The operator lowers the upper frame along with the manifold and pressure
9 intensifier into the sea and onto the lower frame, landing the manifold on the mandrel. During
10 operation, fluid flows from the pressure intensifier through the manifold, the mandrel, and into
11 the flow line.

12 Preferably, the subsea production assembly comprises a Christmas tree with a frame
13 having guide posts. The operator installs extensions to the guide posts, if necessary, and attaches
14 guidelines that extend to a surface platform. The lower and upper frames have sockets with
15 passages for the guidelines. The engagement of the sockets with the guide posts provides gross
16 alignment as the upper and lower frames are lowered onto the tree frame.

17 Also, preferably the Christmas tree frame has upward facing guide members that mate
18 with downward facing guide members on the lower frame for providing finer alignment.
19 Further, the lower frame preferably has upward facing guide members that mate with downward
20 facing guide members on the upper frame for providing finer alignment. One or more locking
21 members on the lower frame lock the lower frame to the tree frame. Additionally, one or more
22 locking members on the upper frame lock the upper frame to the lower frame.

1 Stops or adjustable mechanisms may be incorporated with the locking members or
2 separate. The adjustable stops select minimum distances between the lower frame and the upper
3 plate of the tree frame and between the lower frame and the upper frame. The adjustable stops
4 provide structural load paths from the upper frame through the lower frame and tree frame to the
5 tree and the wellhead on which the tree is mounted. These load paths avoid structural loads
6 passing to through the mandrel to the upward facing receptacle.

7 In another embodiment, the fluid interface device frame is lowered as a unit, but has an
8 upper portion that is vertically movable relative to the lower portion. The pressure intensifier
9 and mandrel are mounted to the upper portion. When the lower portion of the frame lands on the
10 tree frame, the lower end of the mandrel will be spaced above the flow line receptacle. One or
11 more jack mechanisms then lower the upper portion of the frame, causing the mandrel to stab
12 sealingly into the receptacle.

13

1 Brief Description of the Drawings;

2 Figure 1 is an elevational view of a subsea tree assembly, partially in section, and
3 showing a mounting apparatus for mounting a flow interface device in accordance with this
4 invention.

5 Figure 2 is an enlarged view, partially in section, of a choke body of the tree assembly
6 and a lower portion of a mandrel of the apparatus of Figure 1.

7 Figure 3 is a top view of the tree frame of Figure 1, with the mounting apparatus for the
8 flow interface device removed.

9 Figure 4 is a top view of a lower frame of the mounting apparatus of Figure 1.

10 Figure 5 is a sectional view of the lower frame of Figure 4, taken along the line 5 - -5 of
11 Figure 4.

12 Figure 6 is a top view of an upper frame of the mounting apparatus of Figure 1.

13 Figure 7 is a partially sectioned view of the upper frame of Figure 6, taken along the line
14 7 - - 7 of Figure 6.

15 Figure 8 is a schematic view of an alternate embodiment of a mounting system, shown
16 prior to landing on the subsea tree assembly.

17 Figure 9 is a schematic view of the mounting system of Figure 8, with a lower frame of
18 the mounting system landed on the subsea tree assembly and the upper frame in an upper
19 position.

20 Figure 10 is a schematic view of the subsea tree assembly and the mounting system of
21 Figure 8, with the upper frame in a lower position.

1 **Detailed Description of the Invention:**

2 Referring to Figure 1, production assembly 11 in this example includes a subsea
3 Christmas tree 13. Christmas tree 13 is a tubular member with a tree connector 15 on its lower
4 end that connects to a wellhead housing (not shown) located on the sea floor. Tree 13 may be
5 conventional, having a vertical bore with a master valve 17 and a swab valve 19. A production
6 passage in tree 13 leads laterally to a production wing valve 21. Tree 13 may be either a type
7 having a tubing hanger landed within, or it may be a type in which the tubing hanger lands in the
8 wellhead housing below the tree.

9 A production choke body or receptacle 23 mounts to production wing valve 21. Choke
10 body 23 comprises a housing for a choke insert (not shown) that is adjustable to create a back
11 pressure and a desired flow rate. Choke body 23 connects to a production flow line 25 that leads
12 to sea floor processing equipment or directly to a production facility at sea level. After being
13 installed with a pressure intensifier, as will be subsequently explained, a choke insert may not be
14 required. One use for the mounting apparatus of this invention is to retrofit existing trees that
15 have previously operated without a pressure intensifier.

16 Tree 13 may also have an annulus valve 27 that communicates with a tubing annulus
17 passage (not shown) in the well. An annulus choke 29 connects to annulus valve 27 for
18 controlling a flow rate either into or out of the tubing annulus. Annulus choke 29 is normally
19 located on a side of production assembly 11 opposite production choke body 23. Annulus choke
20 29 has a body with a choke insert similar to production choke body 23.

21 A tree cap 31 releasably mounts to the upper end of tree 13. A tree frame 33 extends
22 around tree 13 for mounting various associated equipment and providing protection to tree 13 in
23 if snagged by fishing nets. Tree frame 33 is structurally connected to the body of tree 13, such

1 that weight imposed on tree frame 33 transfers to tree 13 and from there to the wellhead housing
2 (not shown) on which tree 13 is mounted. Tree frame 33 has an upper frame portion or plate 35
3 that in this instance is located above swab valve 19 and below tree cap 31. Upper plate 35
4 surrounds tree 13, as shown in Figure 3, and is generally rectangular in configuration. Tree
5 frame upper plate 35 has a cutout 36 that provides vertical access to choke body 23 and a cutout
6 38 that provides vertical access to annulus choke 29.

7 As shown in Figure 3, preferably tree frame upper plate 35 has a plurality of guide
8 members 37. Guide members 37 may vary in type, and prior to retrofitting with a pressure
9 intensifier, were used to land equipment for retrieving and replacing the choke insert (not shown)
10 in choke body 23 and in annulus choke 29. Although some subsea trees do not have any type of
11 guide members, many do, particularly trees installed during the past 10-15 years. In this
12 example, each guide member 37 comprises an upward facing cylinder with an open top. Guide
13 members 37 are mounted in pairs in this example with a locking member 39 located between
14 them. Locking member 39 has a latch that latches onto a locking member inserted from above.
15 Four separate sets of guide members 37 are shown in Figure 3, with one set located on opposite
16 sides of cutout 36 and the other sets on opposite sides of cutout 38.

17 Figure 3 also shows a control pod receptacle 40 that may be conventional. Control pod
18 receptacle 40 has guide members 37 and locking members 39 for landing an electrical and
19 hydraulic control pod (not shown) lowered from sea level. A plurality of guide posts 41 are
20 located adjacent sides of tree frame 33. Typically, each guide post 41 is located at a corner of
21 tree frame 33, which is generally rectangular configuration. Only one guide post 41 is shown in
22 Figure 1, but the other three are the same in appearance. The existing guide posts 41 likely may
23 not be long enough for the retrofit of a pressure intensifier in accordance with this invention. If

1 so, a guide post extension 42 is installed over each guide post 41, and becomes a part of each
2 guide post 41. Guide post extensions 42 protrude upward past tree cap 31. A guideline 43 with
3 a socket on its lower end slides over and connects to each guide post 41 or guide post extension
4 42, if such are used. Guidelines 43 extend upward to a platform or workover vessel at sea level.

5 Still referring to Figure 1, a flow interface device lower frame 45 lands on and is
6 supported by tree frame upper plate 35. In this embodiment, lower frame 45 is a flat generally
7 rectangular member, as shown in Figure 4, but it need not be a flat plate. A mandrel 47 is
8 secured to one side of lower frame 45. Mandrel 47 has a tubular lower portion with a flange 49
9 that abuts and seals to a mating flange on choke body 23. Alternately, mandrel 47 could be
10 positioned on an opposite edge of lower frame 45 and mate with the body of annulus choke 29,
11 rather than choke body 23.

12 A clamp 51 locks flange 49 to the flange of choke body 23. Clamp 51 is preferably the
13 same apparatus that previously clamped the choke insert (not shown) into choke body 23 when
14 production assembly 11 was being operated without a pressure intensifier. Clamp 51 is
15 preferably hydraulically actuated with hydraulic cylinders 50 (Figure 3). Typically, a
16 mechanical actuator 54 enables an ROV (remote operated vehicle) to release and actuate clamp
17 51 in the event of a failure of hydraulic cylinders 50.

18 Referring to Figure 2, mandrel 47 has a lower bore 52 that aligns with choke body
19 vertical bore 53. A retrievable plug 55 is shown installed within a lower portion of choke
20 vertical bore 53. A lateral passage 57 leads from choke body vertical bore 53 above plug 55 to
21 production wing valve 21 (Figure 1). Plug 55 prevents fluid flowing down through mandrel 47
22 from entering flow line 25. Some installations have a valve in flow line 25 downstream of choke
23 body 23. If so, plug 55 is not required.

1 Referring to Figure 5, lower frame 45 has a plurality of guide members 67 on its lower
2 side that mate with guide members 37 of tree frame upper plate 35 as shown in Figure 3. Only
3 one of the sets of guide members 67 is shown, and they are shown in a schematic form.
4 Furthermore, a locking member 69 protrudes downward from lower frame 45 for locking
5 engagement with one of the locking members 39 (Figure 3) of tree frame upper plate 35. Lock
6 member 69 is also shown schematically. Other types of locks are feasible.

7 Lower frame 45 also has guide post sockets 71, each preferably being a hollow tube with
8 a downward facing funnel on its lower end. Guide post sockets 71 slide over guide lines 43
9 (Figure 1) and guide posts 41 or extensions 42. Guide posts 41 or their extensions 42 provide a
10 gross alignment of mandrel 47 with choke body 23 (Figure 1). Guides 67 and 37 (Figure 1)
11 provide finer alignment of mandrel 47 with choke body 23 (Figure 1).

12 Referring still to Figure 5, lower frame 45 also preferably has a plurality of upward
13 facing guide member 75. In this example, guide members 75 are the same type as guide
14 members 37 (Figure 3), being upward facing cylinders with open tops. Other types of guide
15 members may be utilized as well. In this instance, preferably there are four sets of guide
16 members 75, with each set comprising two guide members 75 with a locking member 77 located
17 between as shown in Figure 4. Guide members 75 are located in vertical alignment with guide
18 members 37 (Figure 3), but could be positioned elsewhere. Lower frame 45 also has a cutout 79
19 on one side for providing vertical access to annulus choke 29 (Figure 3).

20 An adjustment mechanism or mechanisms (not shown) may extend between lower frame
21 45 and tree frame upper plate 37 to assure that the weight on lower frame 45 transfers to tree
22 frame upper plate 37 and not through mandrel 47 to choke body 23. While the lower end of
23 mandrel 47 does abut the upper end of choke body 23, preferably, very little if any downward

1 load due to any weight on lower frame 45 passes down mandrel 47 to choke body 23. Applying
2 a heavy load to choke body 23 could create excessive bending moments on the connection of
3 production wing valve 21 to the body of tree 13. The adjustment mechanisms may comprise
4 adjustable stops on the lower side of lower frame 45 that contact the upper side of tree frame
5 upper plate 37 to provide a desired minimum distance between lower frame 45 and upper plate
6 37. The minimum distance would assure that the weight on lower frame 45 transfers to tree
7 upper plate 35, and from there through tree frame 33 to tree 13 and the wellhead housing on
8 which tree 13 is supported. The adjustment mechanisms could be separate from locking devices
9 69 or incorporated with them.

10 Referring to Figure 1, after lower frame 45 lands and locks to tree frame upper plate 35,
11 an upper frame 81 is lowered, landed, and locked to lower frame 45. Upper frame 81 is also
12 preferably a generally rectangular plate, but it could be configured in other shapes. Upper frame
13 81 has a mandrel connector 83 mounted on an upper side. Mandrel connector 83 slides over
14 mandrel 47 while landing. A locking member 85, which could either be a set of dogs or a split
15 ring, engages a grooved profile on the exterior of mandrel 47. Locking member 85 locks
16 connector 83 to mandrel 47. A hydraulic actuator 87 strokes locking member 85 between the
17 locked and released positions. Preferably, mandrel connector 83 also has a manual actuator 89
18 for access by an ROV in the event of failure of hydraulic actuator 87. A manifold 91 is a part of
19 or mounted to an upper inner portion of mandrel connector 83. Manifold 91 has a passage 93
20 that sealingly registers with mandrel passage 63.

21 As shown by the dotted lines, a motor 95, preferably electrical, is mounted on upper
22 frame 81. A filter 97 is located within an intake line 98 of a subsea pump 99. Motor 95 drives

1 pump 99, and the intake in this example is in communication with sea water. Pump 99 has an
2 outlet line 10 that leads to passage 93 of manifold 91.

3 As shown in Figure 6, upper frame 81 has four guide post sockets 103 for sliding down
4 guidelines 43 (Figure 1) and onto the upper portions of guide posts 41 or guide post extensions
5 42. Upper frame 81 has downward extending guide members 105 that mate with upward
6 extending guide members 75 of lower frame 45, as shown in Figure 7. Locking members 107
7 mate with locking members 77 (Figure 4) of lower frame 45. Upper frame 81 has a central hole
8 109 for access to tree cap 31 (Figure 1).

9 Adjustable mechanisms or stops (not shown) may also extend between lower frame 45
10 and upper frame 81 to provide a minimum distance between them when landed. The minimum
11 distance is selected to prevent the weight of pump 99 and motor 95 from transmitting through
12 mandrel connector 83 to mandrel 47 and choke body 23. Rather, the load path for the weight is
13 from upper frame 81 through lower frame 45 and tree frame upper plate 35 to tree 13 and the
14 wellhead housing on which it is supported. The load path for the weight on upper frame 81 does
15 not pass to choke body 23 or through guide posts 41. The adjustable stops could be separate
16 from locking devices 107 or incorporated with them.

17 In the operation of this example, production assembly 11 may have been operating for
18 some time either as a producing well, or an injection well with fluid delivered from a pump at a
19 sea level platform. Also, production assembly 11 could be a new installation. Lower frame 45,
20 upper frame 81 and the associated equipment would originally not be located on production
21 assembly 11. If production assembly 11 were formerly a producing well, a choke insert (not
22 shown) would have been installed within choke body 23.

1 To install pressure intensifier 99, the operator would attach guide post extensions 42, if
2 necessary, and extend guidelines 43 to the surface vessel or platform. The operator removes the
3 choke insert in a conventional manner by a choke retrieval tool (not shown) that interfaces with
4 the two sets of guide members 37 adjacent cutout 36 (Fig. 3). If production assembly 11 lacks a
5 valve on flow line 25, the operator lowers a plug installation tool on guidelines 43 and installs a
6 plug 55.

7 The operator then lowers lower frame 45 along guidelines 43 and over guide posts 41.
8 While landing, guide members 67 and lock members 69 (Figure 5) slidably engage upward
9 facing guide members 37 and locking members 39 (Figure 1). The engagement of guide
10 members 37 and 67 provides fine alignment for mandrel 47 as it engages choke body 23. Then,
11 clamp 51 is actuated to connect the lower end of mandrel 47 to choke body 23.

12 The operator then lowers upper frame 81, including pump 99, which has been installed at
13 the surface on upper frame 81. Upper frame 81 slides down guidelines 43 and over guide posts
14 41 or their extensions 42. After manifold 91 engages mandrel 47, connector 83 is actuated to
15 lock manifold 91 to mandrel 47. Electrical power for pump motor 95 may be provided by an
16 electrical wet-mate connector (not shown) that engages a portion of the control pod (not shown),
17 or in some other manner. If the control pod did not have such a wet mate connector, it could be
18 retrieved to the surface and provided with one.

19 Once installed, with valves 17 and 21 open, sea water is pumped by pump 99 through
20 outlet line 101, and flow passages 93, 52 (Figure 2) into production wing valve 21. The sea
21 water flows down the well and into the formation for water flood purposes. If repair or
22 replacement of pressure intensifier 99 is required, it can be retrieved along with upper frame 81
23 without disturbing lower frame 45.

1 An alternate embodiment is shown in Figures 8-10. Components that are the same as in
2 the first embodiment are numbered the same. The mounting system has a lower frame or frame
3 portion 111 and an upper frame or frame portion 113. Jack mechanisms, such as hydraulic
4 cylinders 115, extend between lower and upper frames 111, 113. Hydraulic cylinders 115 move
5 upper frame 113 relative to lower frame 111 from an upper position, shown in Figures 8 and 9, to
6 a lower position, shown in Figure 10. Lower frame 111 preferably has guide members on its
7 lower side for engaging upward facing guides on tree frame upper plate 35, although they are not
8 shown in the drawings.

9 Mandrel 117 is rigidly mounted to upper frame 113 in this embodiment and has a
10 manifold portion on its upper end that connects to outlet line 101, which in turn leads from
11 pressure intensifier or pump 99. Mandrel 117 is positioned over or within a hole 118 in lower
12 frame 111. When upper frame 113 moves to the lower position, shown in Figure 10, mandrel
13 117 extends down into engagement with the receptacle of choke body 23.

14 In the operation of the second embodiment, pressure intensifier 99 is mounted to upper
15 frame 113, and upper and lower frames 113, 111 are lowered as a unit. Hydraulic cylinders 115
16 will support upper frame 113 in the upper position. Guidelines 43 and guide posts 41 guide the
17 assembly onto tree frame upper plate 35, as shown in Figure 9. Guide members (not shown)
18 provide fine alignment of lower frame 111 as it lands on tree frame upper plate 35. The lower
19 end of mandrel 117 will be spaced above choke body 23. Then hydraulic cylinders 115 allow
20 upper frame 113 to move downward slowly. Mandrel 117 engages choke body 23, and clamp 51
21 is actuated to clamp mandrel 117 to choke body 23. Locks (not shown) lock lower and upper
22 frames 111, 113 to the tree frame of tree 13.

1 This invention has significant advantages. The lower frame and mandrel are much lighter
2 in weight and less bulky than the upper frame and pump assembly. Consequently, it is easier to
3 guide the mandrel into engagement with the choke body than it would be if the entire assembly
4 were joined together and lowered as one unit. Once the lower frame is installed, the upper frame
5 and pump assembly can be lowered with a lesser chance of damage to the subsea equipment.
6 The upper end of the mandrel is rugged and strong enough to withstand accidental impact by the
7 upper frame. The two-step process thus makes installation much easier. The optional guide
8 members further provide fine alignment to avoid damage to seating surfaces. The movable
9 upper and lower frames of the mounting system of the alternate embodiment avoid damage to the
10 seating surfaces of the mandrel and the receptacle.

11 While the invention has been shown in only two of its forms, it should be apparent to
12 those skilled in the art that it is not so limited but is susceptible to various changes without
13 departing from the scope of the invention. For example, although shown in connection with a
14 subsea tree assembly, the mounting apparatus could be installed on other subsea structures, such
15 as a manifold or gathering assembly. Also, the flow interface device mounted to the upper frame
16 could be a compressor for compressing gas, a flow meter for measuring the flow rate of the
17 subsea well, or some other device.

18

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

CLAIMS:

1. In a subsea production assembly having a flow line containing an upward facing receptacle,
the improvement comprising:
- a lower frame that is lowered into the sea and landed on the production assembly;
 - a mandrel mounted to the lower frame, the mandrel having a lower end that lands on and
connects to the receptacle, the mandrel having a flow passage for fluid communication with the
receptacle;
 - an upper frame that is lowered into the sea and landed on the lower frame;
 - a flow interface device mounted on the upper frame;
 - a manifold carried by and lowered with the upper frame, the manifold having a lower end
that lands on and connects to an upper end of the mandrel, the manifold having a flow passage
that registers with the flow passage in the mandrel; and
 - the flow interface device being in fluid communication with the flow passage of the
manifold.
2. The production assembly according to claim 1, further comprising:
- a plurality of guide posts on the production assembly for connecting to guide lines;
 - a plurality of guide sockets on the lower frame that slide down the guide lines and land on the
guide posts; and
 - a plurality of guide sockets on the upper frame that slide down the guide lines and land on the
guide posts.

- 1 3. The production assembly according to claim 1, further comprising:
2 a plurality of guide members on the production assembly;
3 a plurality of guide members on the lower frame that engage the guide members on the
4 production assembly as the lower frame lands on the production assembly to align the mandrel
5 with the receptacle.
6
- 7 4. The production assembly according to claim 1, further comprising:
8 a plurality of guide members on the lower frame; and
9 a plurality of guide members on the upper frame that engage the guide members on the lower
10 frame to align the manifold with the mandrel as the upper frame lands on the lower frame.
11
- 12 5. The production assembly according to claim 1, further comprising:
13 a plurality of guide posts on the production assembly for connecting to guide lines;
14 a plurality of guide sockets on the lower frame that slide down the guide lines and land on the
15 guide posts to provide coarse alignment of the mandrel with the receptacle as the lower frame
16 lands on the production assembly; and
17 a plurality of mating guide members on the production assembly and the lower frame that
18 slidably engage each other for providing a finer alignment of the mandrel with the receptacle as
19 the lower frame lands on the production assembly.
20
- 21 6. The production assembly according to claim 1, further comprising:
22 a plurality of guide posts on the production assembly for connecting to guide lines;

1 a plurality of guide sockets on the upper frame that slide down the guide lines and land on the
2 guide posts to provide coarse alignment of the manifold with the mandrel as the upper frame
3 lands on the lower frame; and
4 a plurality of mating guide members on the lower frame and the upper frame that slidingly
5 engage each other for providing a finer alignment of the mandrel with the receptacle as the lower
6 frame lands on the production assembly.

7
8 7. The production assembly according to claim 1, further comprising:
9 a lower locking member on the lower frame that locks the lower frame to the production
10 assembly.

11
12 8. The production assembly according to claim 1, further comprising:
13 an upper locking member on the upper frame that locks the upper frame to the lower frame.

14
15 9. The production assembly according to claim 1, wherein the flow interface device comprises a
16 pump having an inlet for drawing sea water and a motor for driving the pump.

17
18 10. In a subsea production assembly having a Christmas tree mounted on a wellhead, a choke
19 body connected to and on one side of the tree, a flow line extending from the choke body, and a
20 tree frame structurally connected to the Christmas tree, the improvement comprising:

21 a lower frame that lands on the tree frame;

1 a mandrel mounted to the lower frame, the mandrel having a tubular lower end that lands
2 on and connects to the choke body, the mandrel having a flow passage that registers with an
3 interior of the choke body;

4 an upper frame for supporting a pressure intensifier;

5 a manifold carried by and lowered with the upper frame, the manifold having a lower end
6 that lands on and connects to an upper end of the mandrel, the manifold having a flow passage
7 that registers with the flow passage in the mandrel for communicating the pressure intensifier
8 with the manifold;

9 at least one stop member located between the tree frame and the lower frame, and at least
10 one stop member located between the upper and lower frames, for transferring substantially the
11 entire weight of the pressure intensifier from the upper frame, and through the lower frame and
12 tree frame to the tree and the wellhead.

13

14 11. The production assembly according to claim 10 wherein the stop members are adjustable in
15 height.

16

17 12. In a subsea production assembly having a Christmas tree, a choke body connected to and on
18 one side of the tree, a flow line extending from the choke body, and a set of guide posts for
19 connection to guidelines, the improvement comprising:

20 a lower frame that lands on the production assembly, the lower frame having a set of
21 guide sockets for sliding down the guidelines and engaging the guide posts;

1 a mandrel mounted to the lower frame, the mandrel having a tubular lower end that lands
2 on and connects to the choke body, the mandrel having a flow passage that registers with an
3 interior of the choke body;

4 an upper frame for supporting a pressure intensifier, the upper frame having a set of guide
5 sockets for sliding down the guidelines and engaging the guide posts above the guide sockets of
6 the lower frame; and

7 a manifold carried by and lowered with the upper frame, the manifold having a lower end
8 that lands on and connects to an upper end of the mandrel, the manifold having a flow passage
9 that registers with the flow passage in the mandrel for communicating the pressure intensifier
10 with the manifold.

11

12 13. The production assembly according to claim 12, further comprising:

13 a hydraulically actuated locking member on the production assembly for locking the
14 mandrel to the choke body.

15

16 14. The production assembly according to claim 12, further comprising:

17 a hydraulically actuated locking member on the manifold that locks the manifold to the
18 mandrel.

19

20 15. The production assembly according to claim 12, further comprising:

21 mating guide members on a lower side of the lower frame and an upper side of the
22 production assembly for providing fine alignment of the mandrel with the choke body as the
23 lower frame lands on the production assembly.

1

2 16. The production assembly according to claim 12, further comprising:

3 mating guide members on a lower side of the upper frame and an upper side of the lower
4 frame for providing fine alignment of the manifold with the mandrel as the upper frame lands on
5 the lower frame.

6

7 17. The production assembly according to claim 12, further comprising:

8 a lower locking member on the lower frame that locks the lower frame to the production
9 assembly.

10

11 18. The production assembly according to claim 12, further comprising:

12 an upper locking member on the upper frame that locks the upper frame to the lower frame.

13

14 19. A method of flowing fluid into a flow line of a subsea production assembly, the flow line
15 containing an upward facing receptacle, comprising:

16 (a) mounting a mandrel with a flow passage to a lower frame;

17 (b) lowering the lower frame into the sea and onto the production assembly and landing a
18 lower portion of the mandrel on the receptacle;

19 (c) mounting a pressure intensifier and a manifold to an upper frame; then

20 (d) lowering the upper frame and the pressure intensifier into the sea and onto the lower
21 frame, and landing a lower portion of the manifold on the mandrel; then

22 (e) operating the pressure intensifier to deliver fluid through the receptacle into the flow
23 line.

1

2 20. The method according to claim 19, wherein the fluid of step (e) comprises sea water that is
3 drawn into an intake of the pressure intensifier.

4

5 21. The method according to claim 19, wherein step (b) comprises lowering the lower frame on
6 guidelines that extend to guide posts of the production assembly.

7

8 22. The method according to claim 19, wherein step (d) comprises lowering the upper frame on
9 guidelines that extend to guide posts of the production assembly.

10

11 23. The method according to claim 19, wherein step (b) comprises locking the lower frame to
12 the production assembly.

13

14 24. The method according to claim 19, wherein step (d) comprises locking the upper frame to the
15 production assembly.

16

17 25. An apparatus for flowing fluid into a flow line of a subsea production assembly, the flow line
18 containing an upward facing receptacle, comprising:

19 a pressure intensifier mounted to an upper portion of the frame;

20 a mandrel having a flow passage and being mounted to an upper portion of the frame in
21 fluid communication with the mandrel; and

22 a jack mechanism connected between the upper portion of the frame and a lower portion
23 of the frame for moving the upper portion of the frame from an upper position downward relative

1 to the lower portion of the frame, the mandrel having a lower portion spaced above the
2 receptacle while the upper portion of the frame is in the upper position after the lower portion of
3 the frame has landed on the production assembly, the jack mechanism subsequently lowering the
4 upper portion of the frame to the lower position wherein the lower portion of the mandrel
5 engages the receptacle.

6

7 26. A method of flowing fluid into a flow line of a subsea production assembly, the flow line
8 containing an upward facing receptacle, comprising:

9 (a) mounting a pressure intensifier and a mandrel with a flow passage to an upper portion
10 of a frame, the pressure intensifier being in fluid communication with the mandrel, the upper
11 portion of the frame being vertically movable relative to a lower portion of the frame; then

12 (b) lowering the frame into the sea and onto the production assembly and landing the
13 lower portion of the frame on the production assembly with the mandrel spaced above the
14 receptacle; then

15 (c) lowering the upper portion of the frame and stabbing the mandrel into sealing
16 engagement with the receptacle; then

17 (d) operating the pressure intensifier to deliver fluid through the receptacle into the flow
18 line.

19

1 **Abstract of the Disclosure:**

2 A mounting system for a pressure intensifier for a subsea production assembly utilizes a
3 two-step process. First, a lower frame with a mandrel is lowered onto the subsea production
4 assembly, with the mandrel stabbing into an upward facing receptacle. Then, an upper frame and
5 a pressure intensifier and manifold are lowered onto the lower frame. The manifold sealingly
6 engages the upper end of the mandrel, the manifold being connected to the pressure intensifier.
7 Guidelines attached to guide posts provide gross alignment for the lower and upper frames.
8 Mating guide members on the upper and lower frames and the production assembly provide fine
9 alignment.

10

11

12

43.



V2003043

217

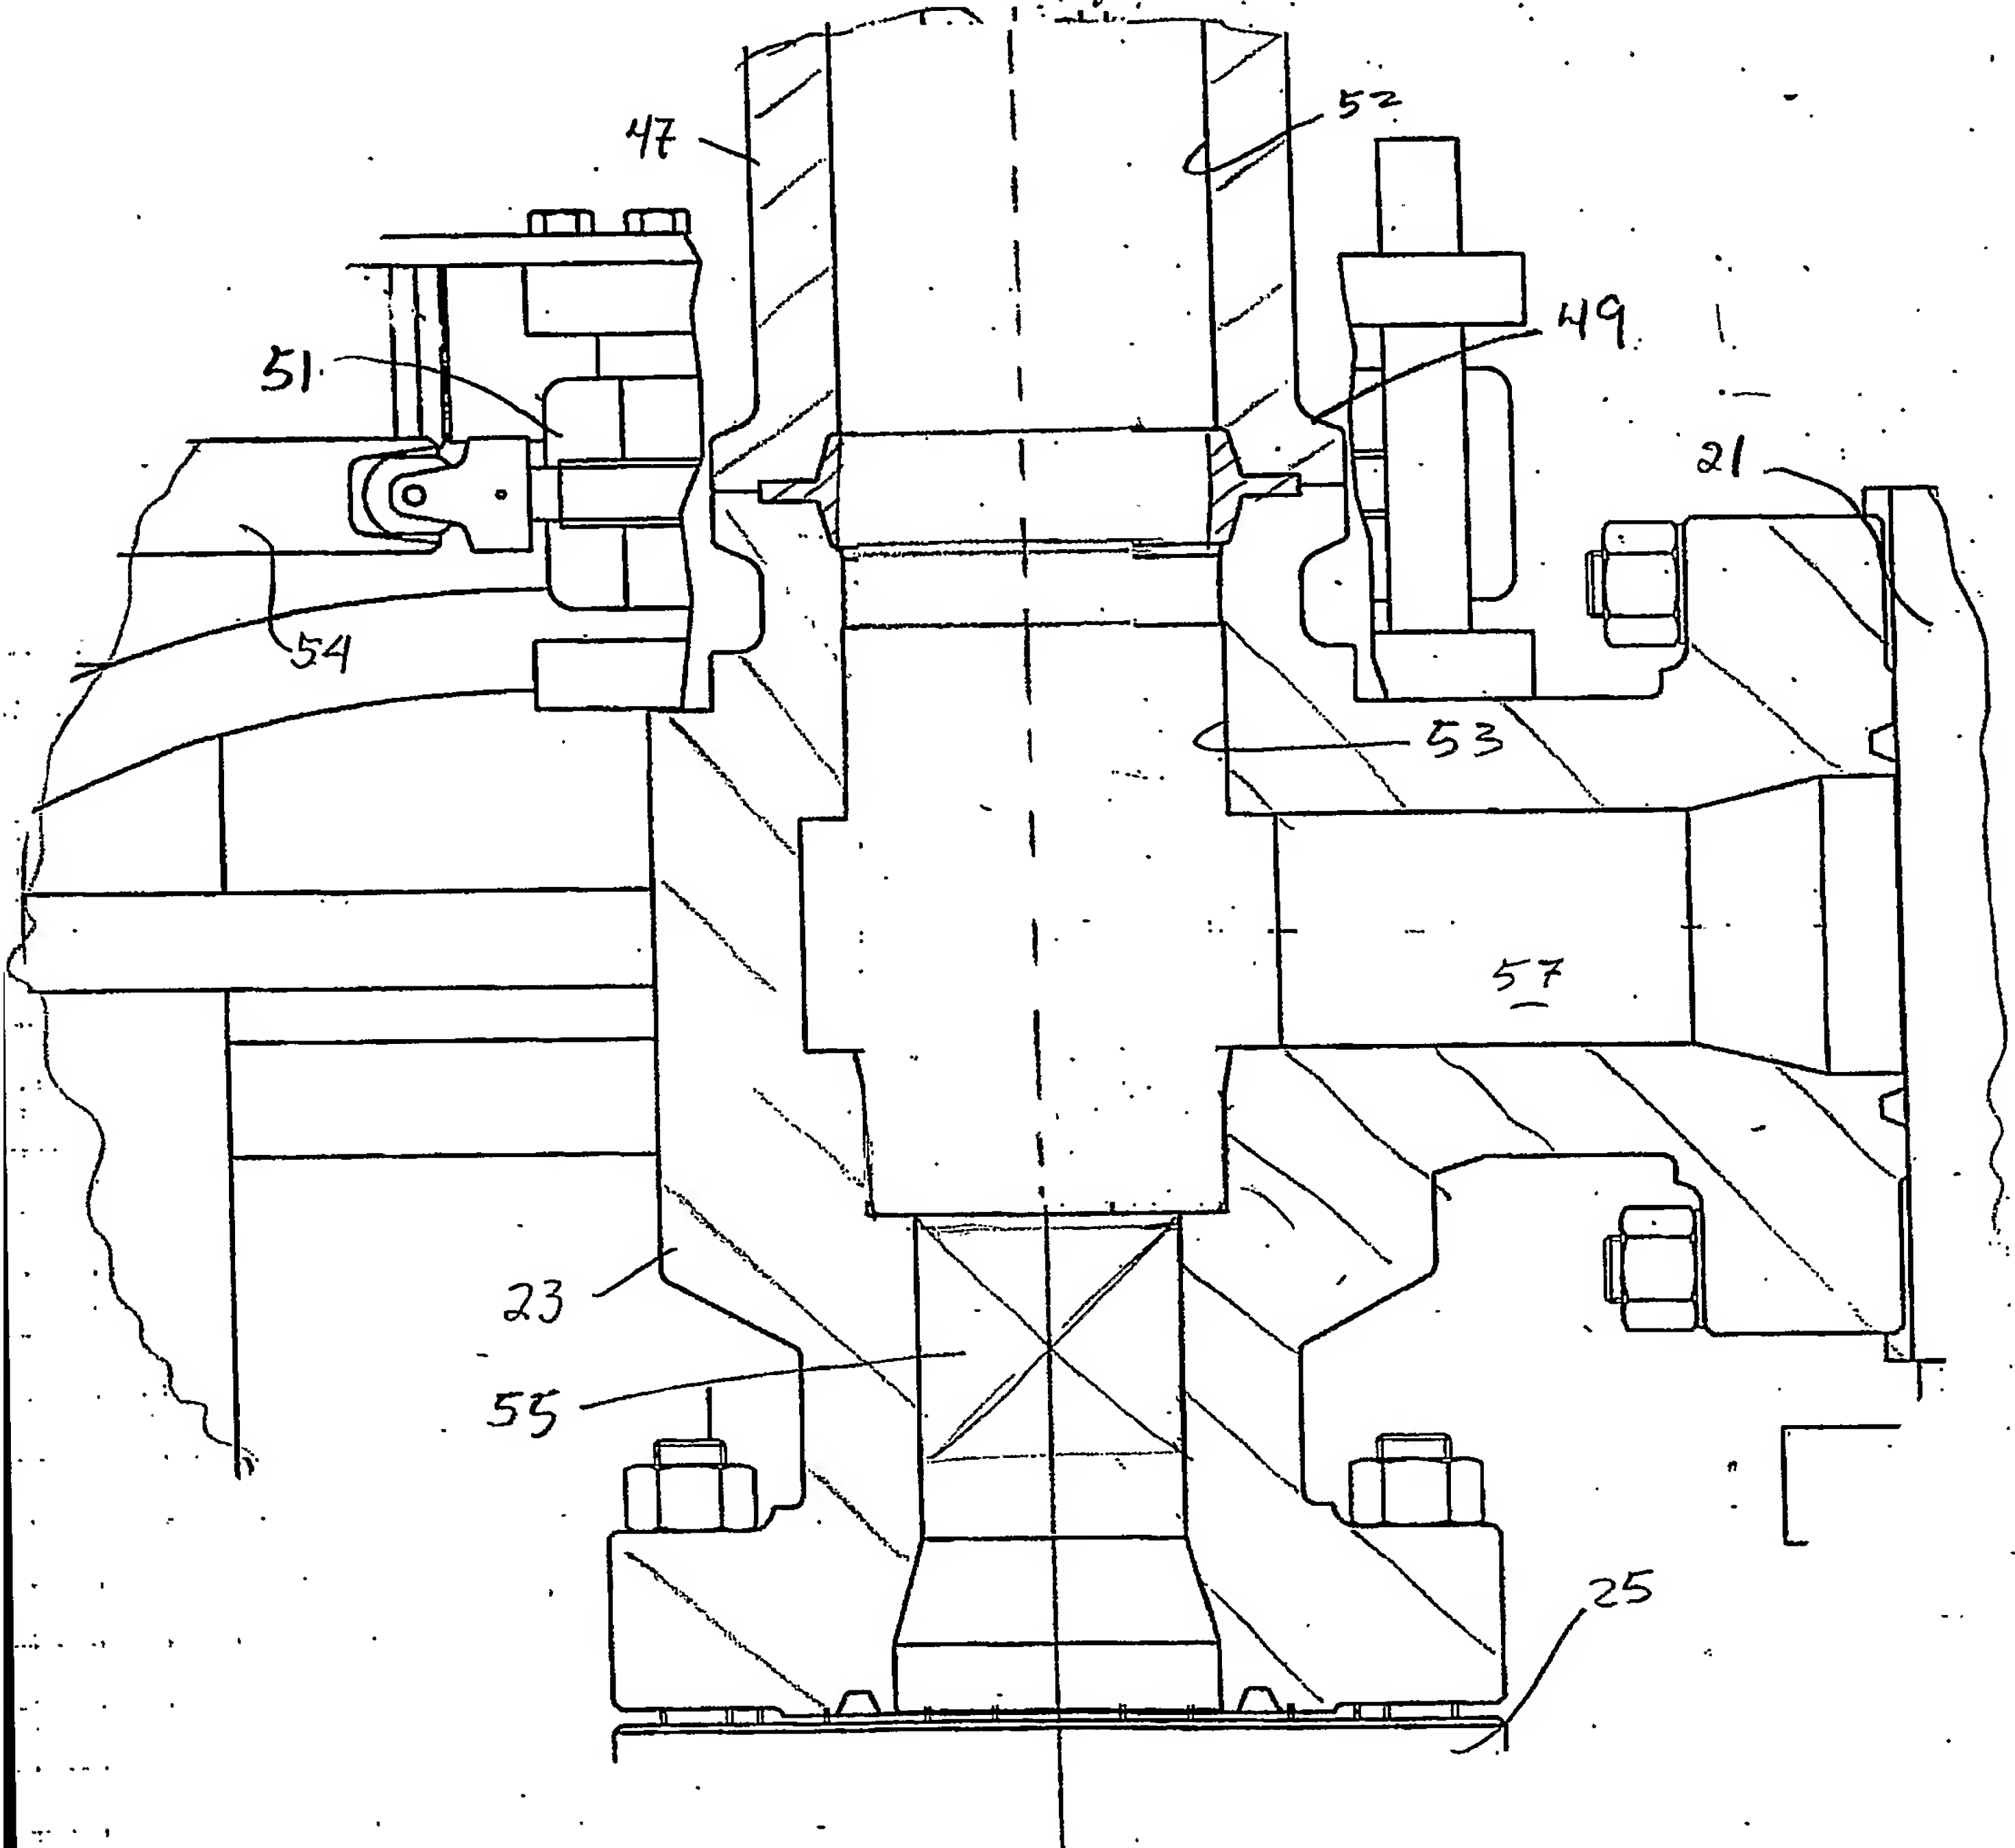


FIG 2

V 2003043
317

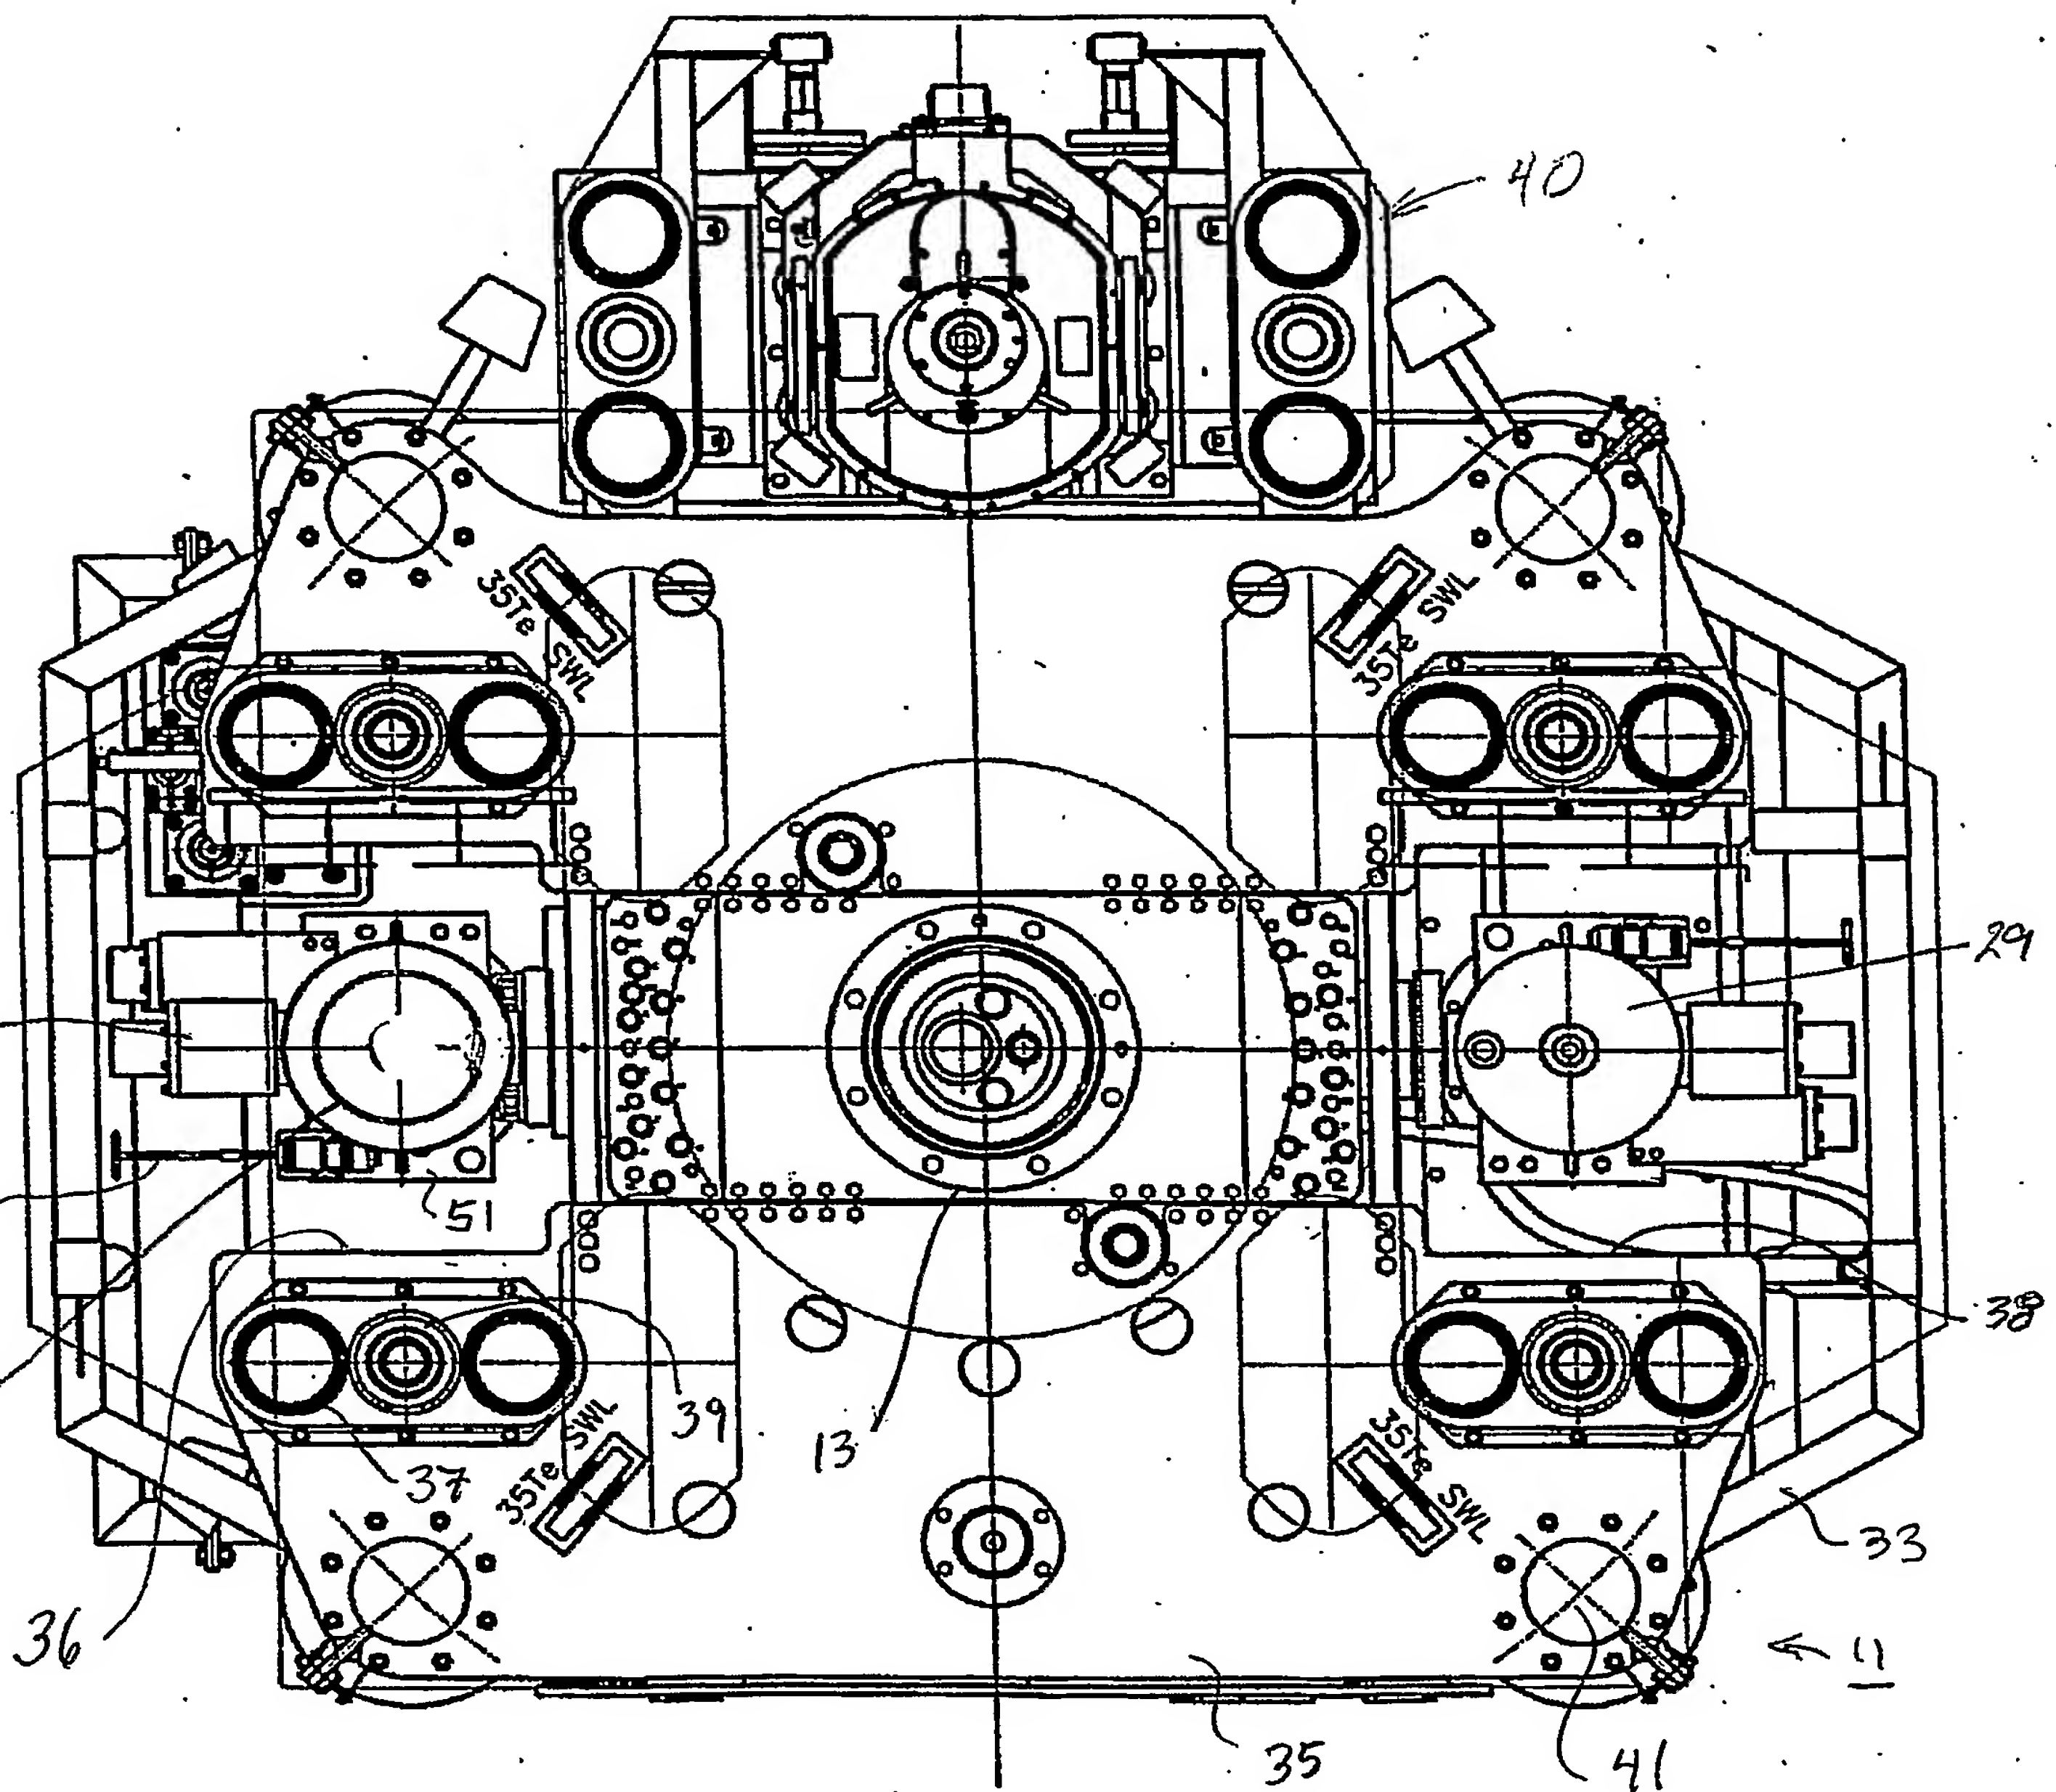


FIG. 3:

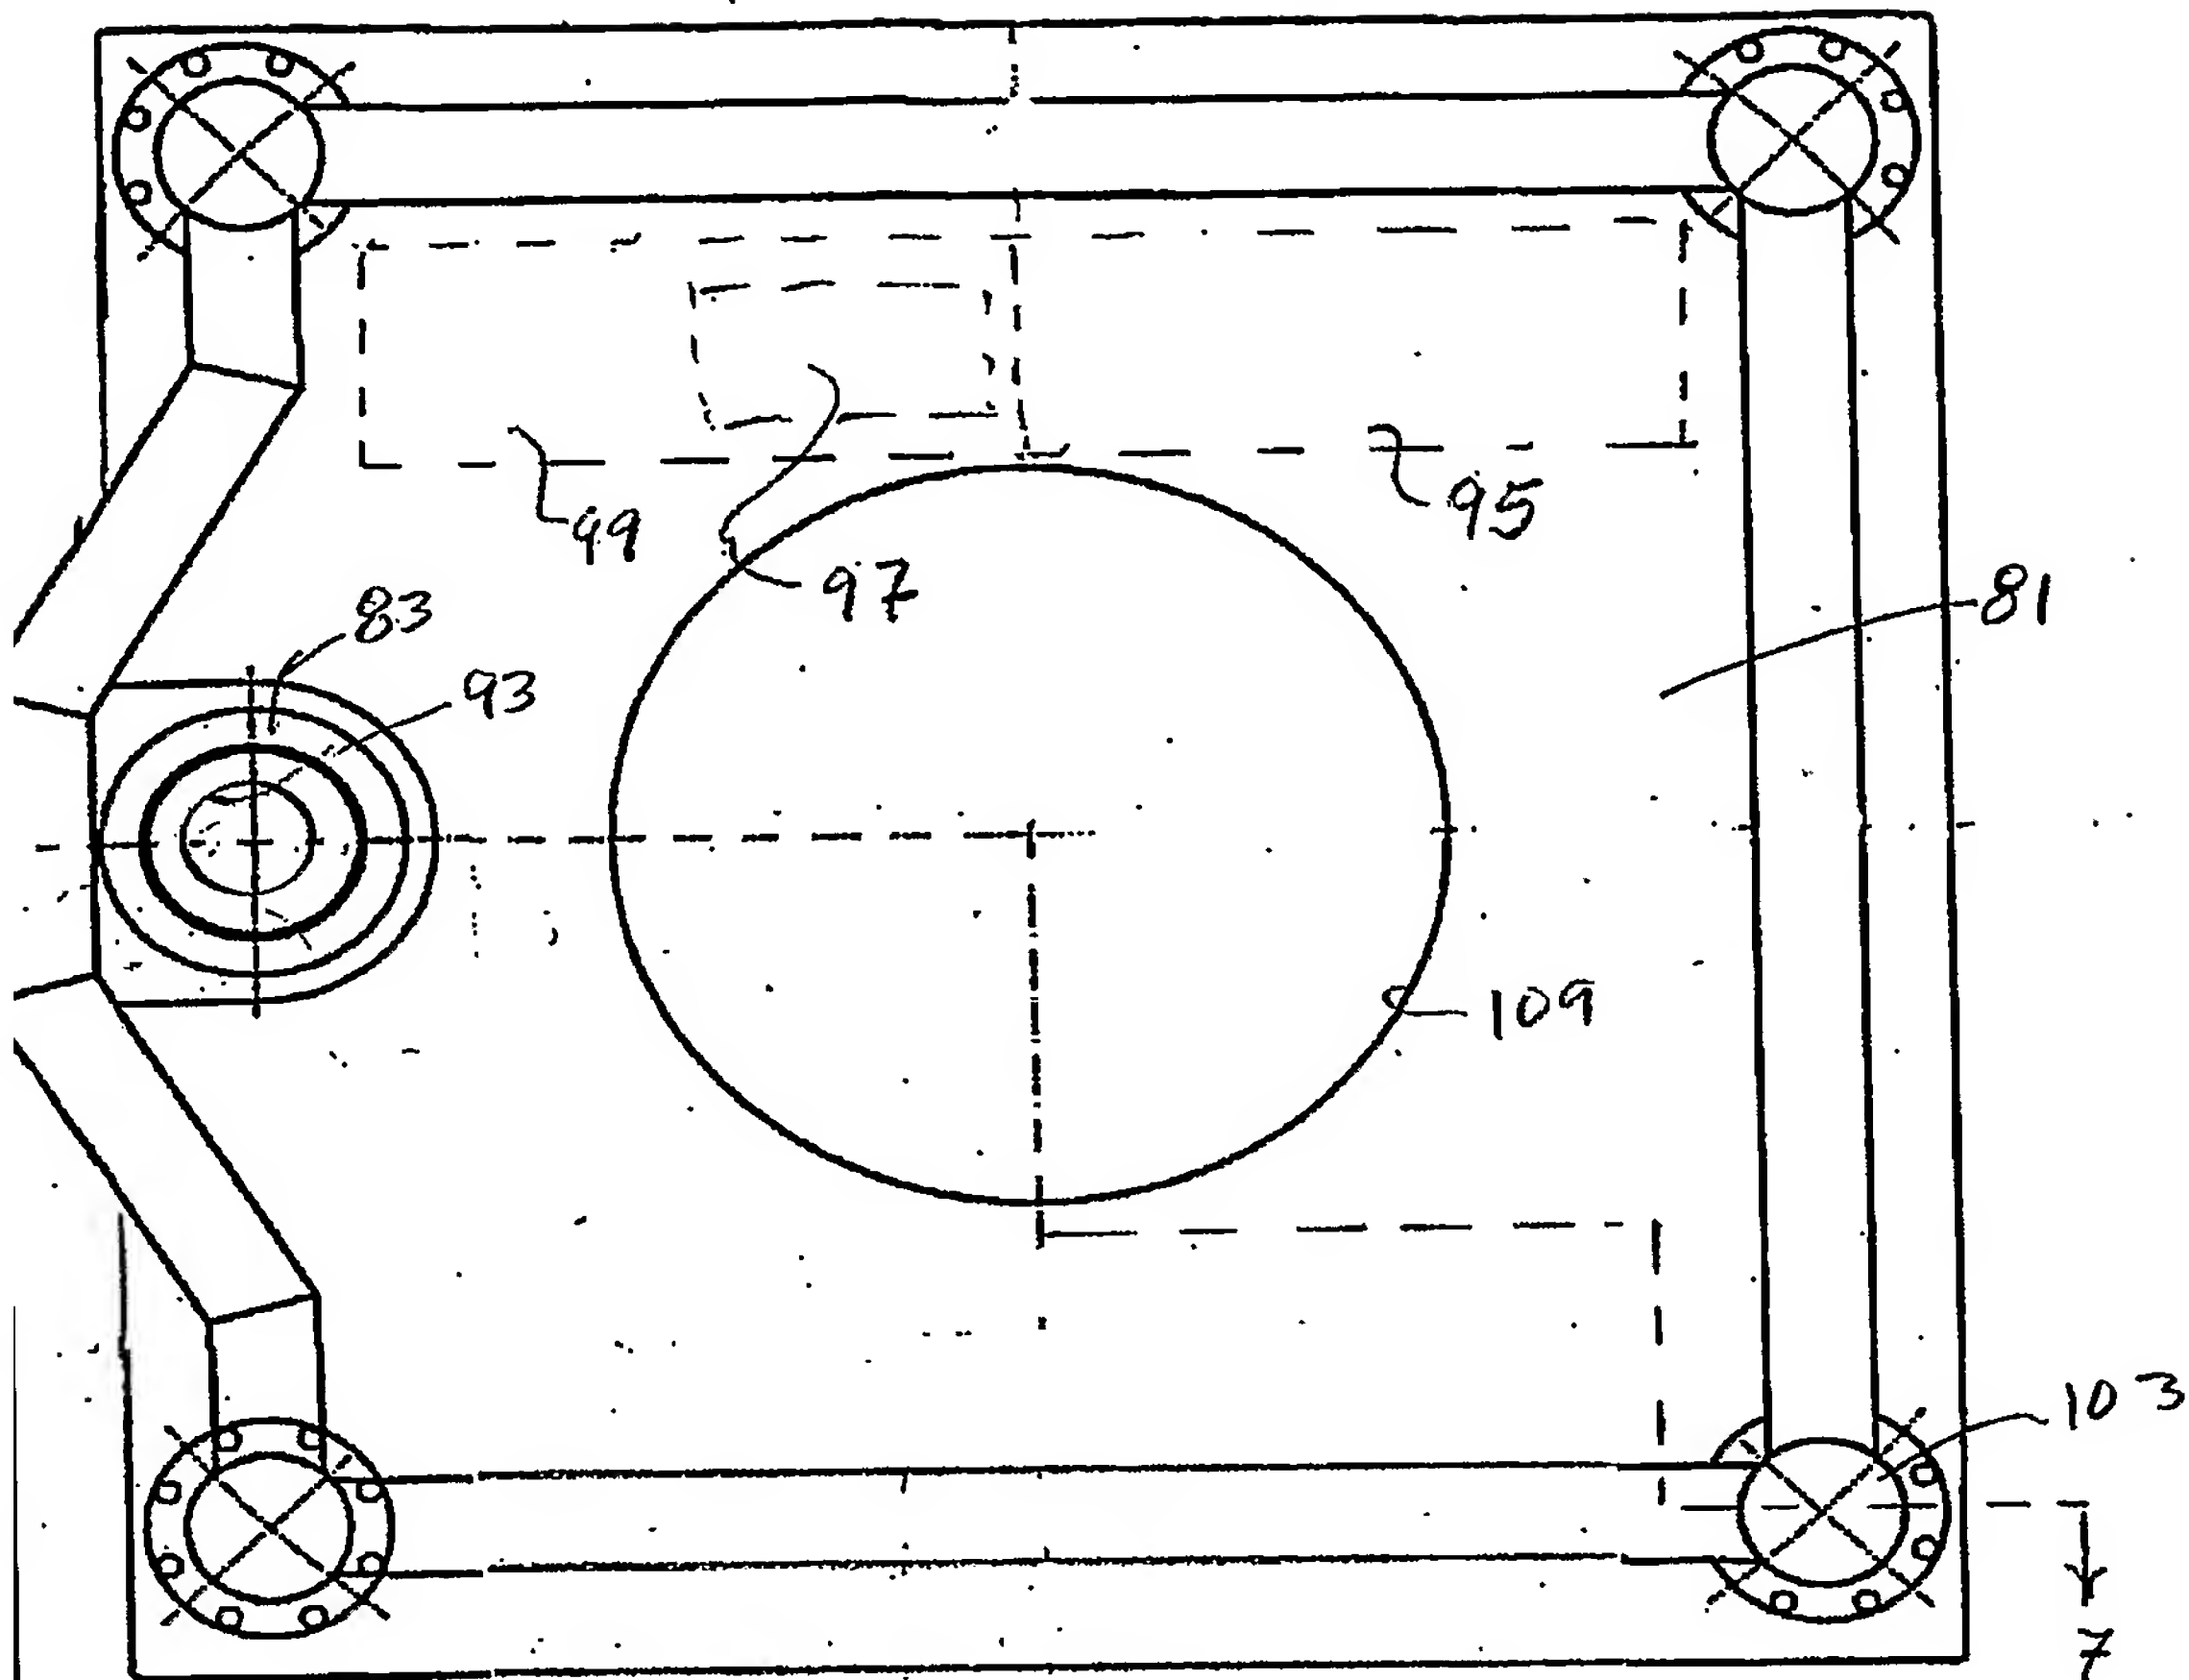


FIG. 6



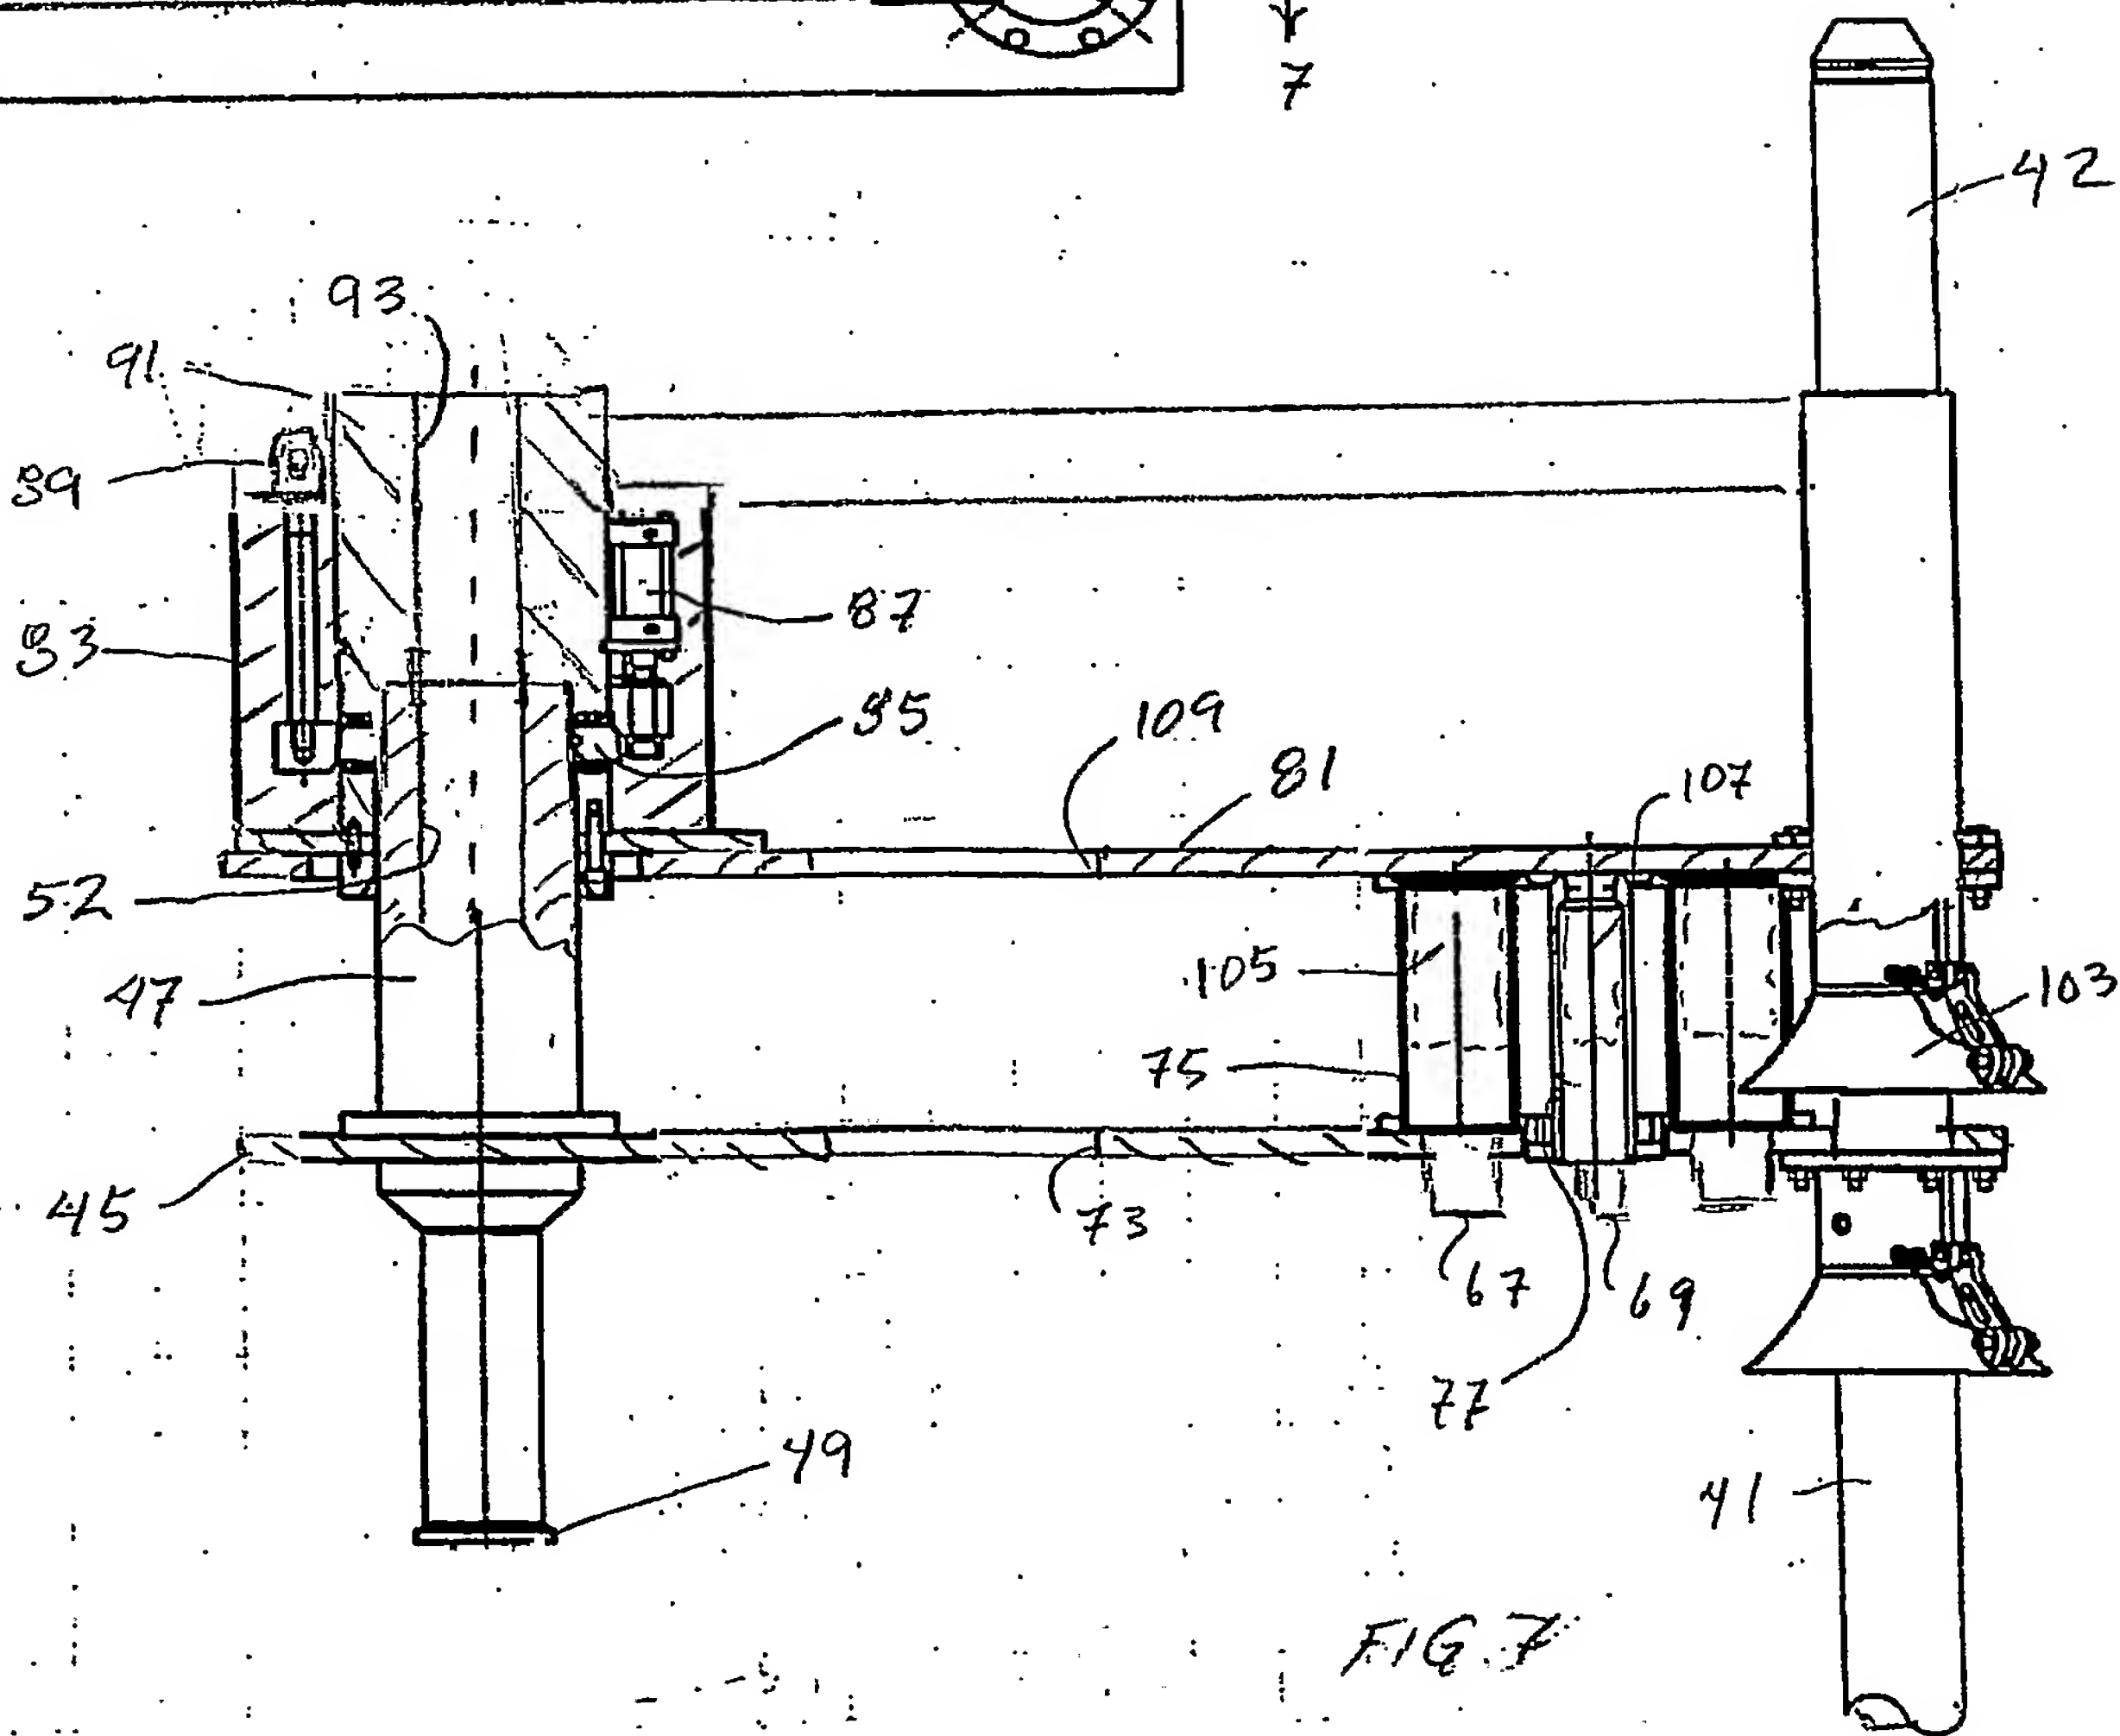


FIG. 7

6/7

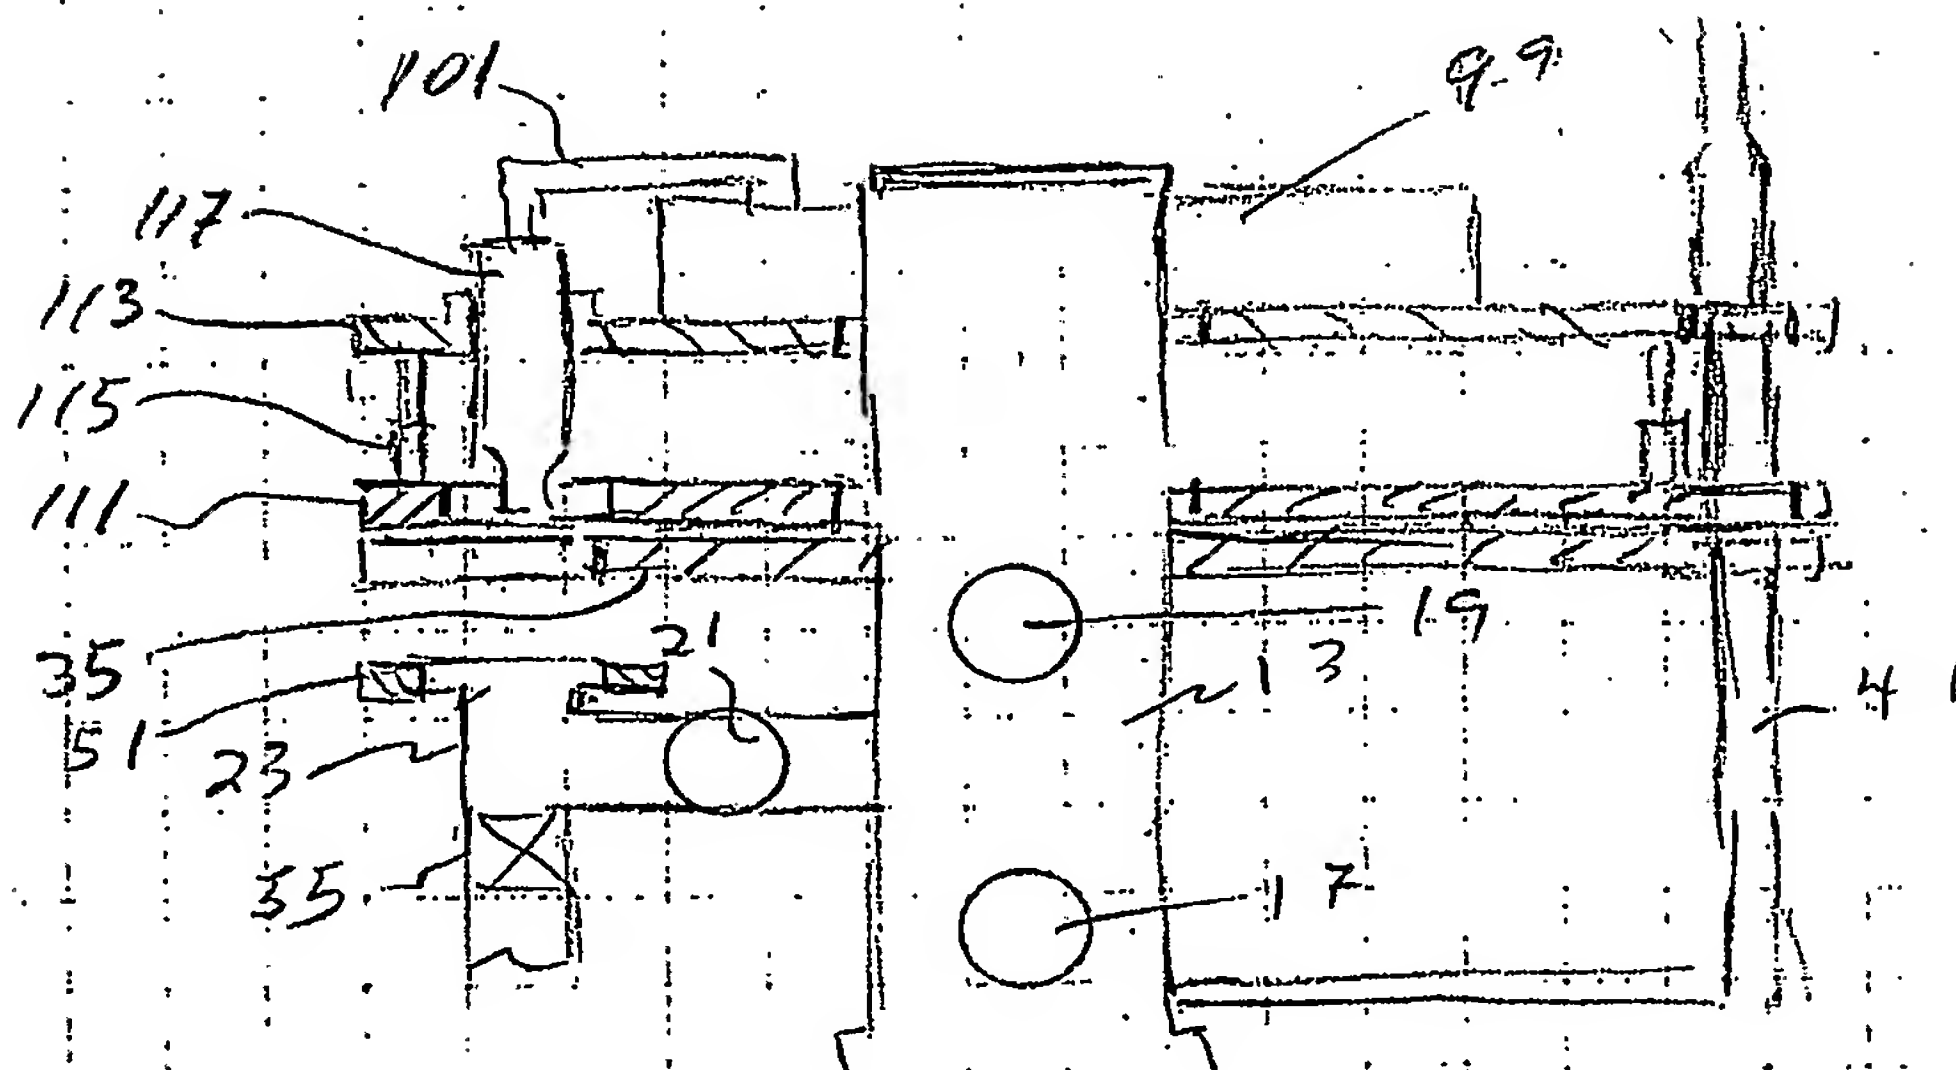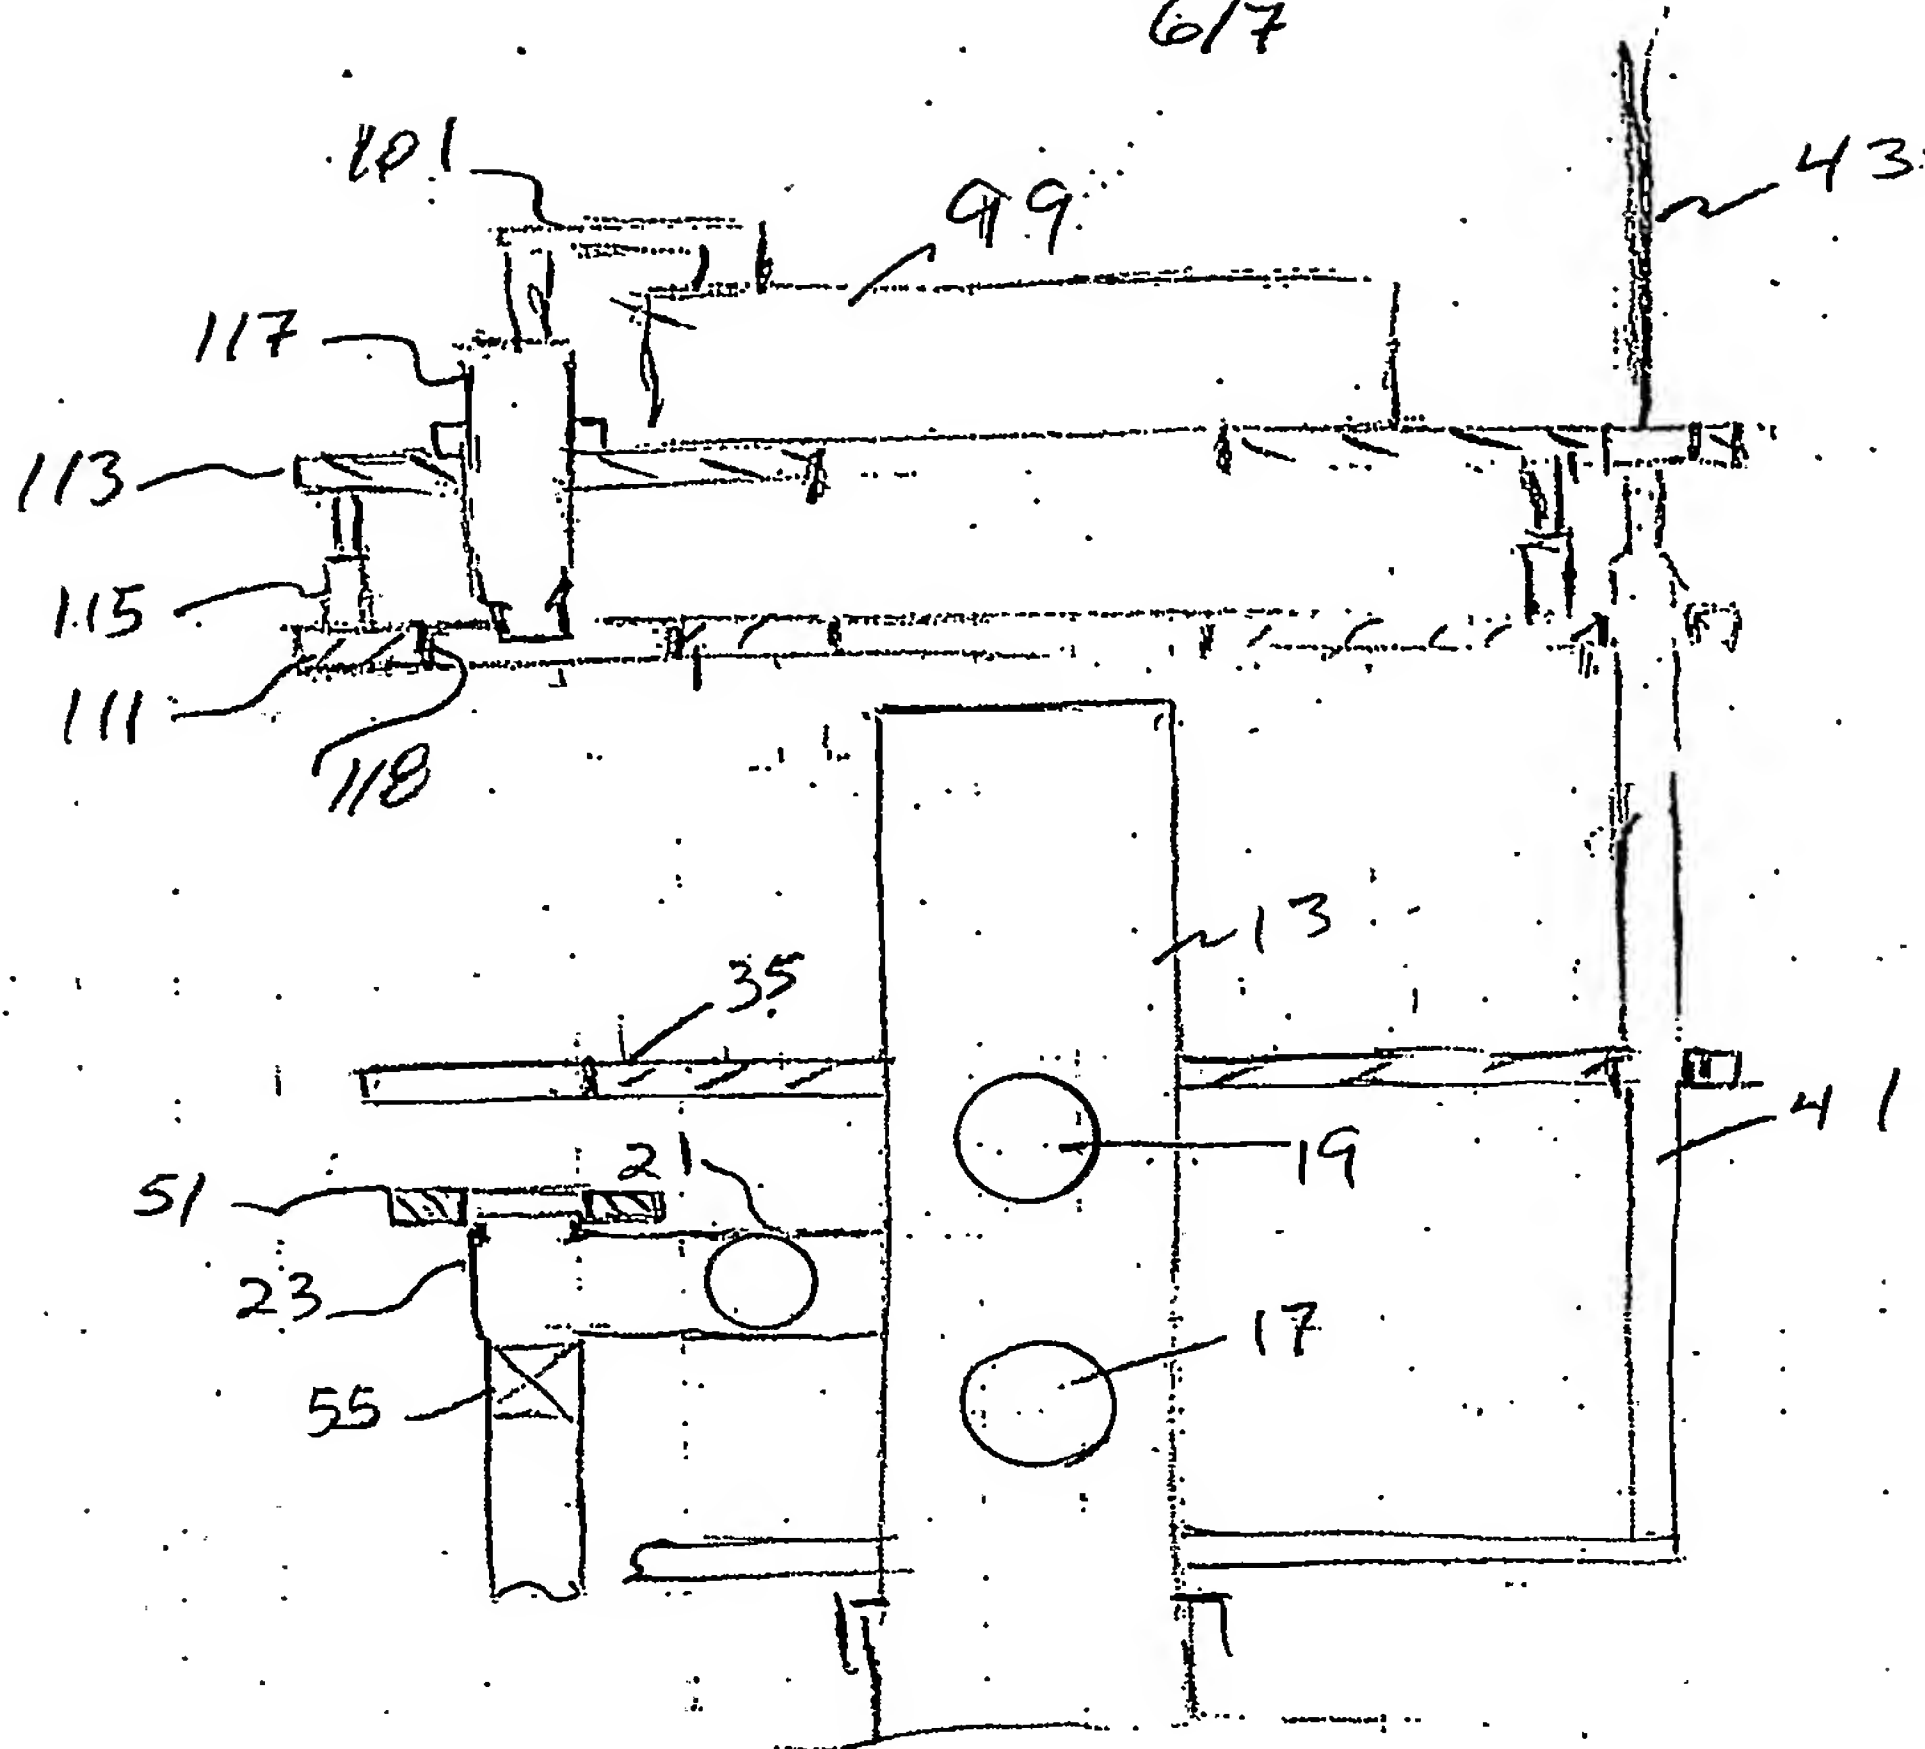

V2003043

7/7

